

## PHM Series Power Supply

### Features

- Universal AC Input (AC100~240V)
- Regulated DC Output
- 500mA peak charging current
- Cooling by Free Air Convection
- Protection Systems : Over Load, Over Voltage, Short Circuit, Over Temperature, Battery Low Voltage


### PHM with Din Rail Clip



Specification	PHM21-138	PHM35-138	PHM48-138	PHM76-138	PHM48-276	PHM76-276
Input	AC 100~240V 50/60Hz					
DC Output	13.8V / 1A	13.8V / 2A	13.8V / 3A	13.8V / 5A	27.6V / 1.5A	27.6V / 2.5A
Charge Current (max)	500mA				250mA	
Number of o/p Ports	1	1	2	3	2	3
Dimensions	123W x 95L x 50H mm					

### PHM with Metal Enclosure

*Metallic Enclosure provide Maximum Protection to the Power Supply and Back-up Battery*

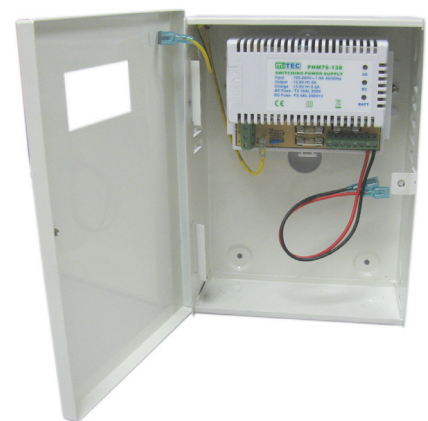

Specification	PHM21-138-A	PHM35-138-A	PHM48-138-A	PHM76-138-A	PHM48-276-B	PHM76-276-B
Input	AC 100~240V 50/60Hz					
DC Output	13.8V / 1A	13.8V / 2A	13.8V / 3A	13.8V / 5A	27.6V / 1.5A	27.6V / 2.5A
Charge Current (max)	500mA				250mA	
Number of o/p Ports	1	1	2	3	2	3
Dimensions	210W x 280H x 80 mm				322W x 322W x 80 mm	