

MKP-6210

MKP-6210 has slimmest outfit around all keypad products, which contain LED & Audible indication, programmable relay output and P.B. for Door Release. Also MKP-6210 could remember 99 sets of pin codes inside this tiny aluminum housing under a grantee safe 12V DC input, which makes it a great device to use in different situations.




Features:

- 2 LED Display
- 99 Pin Code (4-8 Digit)
- Programmable Relay Output
- IP65

ELECTRICAL CHARACTERISTICS	
Power Input	12V DC, from a power supply
Maximum Input Current	60 mA at 12VDC
Standby Input Current	25 mA at 12VDC
Relay Output Loading	Max 2 Amps Normally Open or Normally Closed (Lock Relays)
AL-Output Loading	-
OPERATIONAL CHARACTERISTICS	
P.B. Input (REX)	Normally Open (Dry Contact) for activating the lock relay
REED Input	-
Pin-Codes	99 PIN Codes (4 - 8 Digit)
LED Indication	2 LEDs: Power/Program and Lock Out status
ENVIRONMENTAL CHARACTERISTICS	
Operating Environment	IP 65
Operating Temperature	-20°C to 60°C
Operating Humidity	0 to 95% Non-condensing
PHYSICAL CHARACTERISTICS	
Dimensions	43 (W) x 145 (H) x 10 (D) mm
Weight (Approx.)	110 g

MKP-6210

Structure Diagram

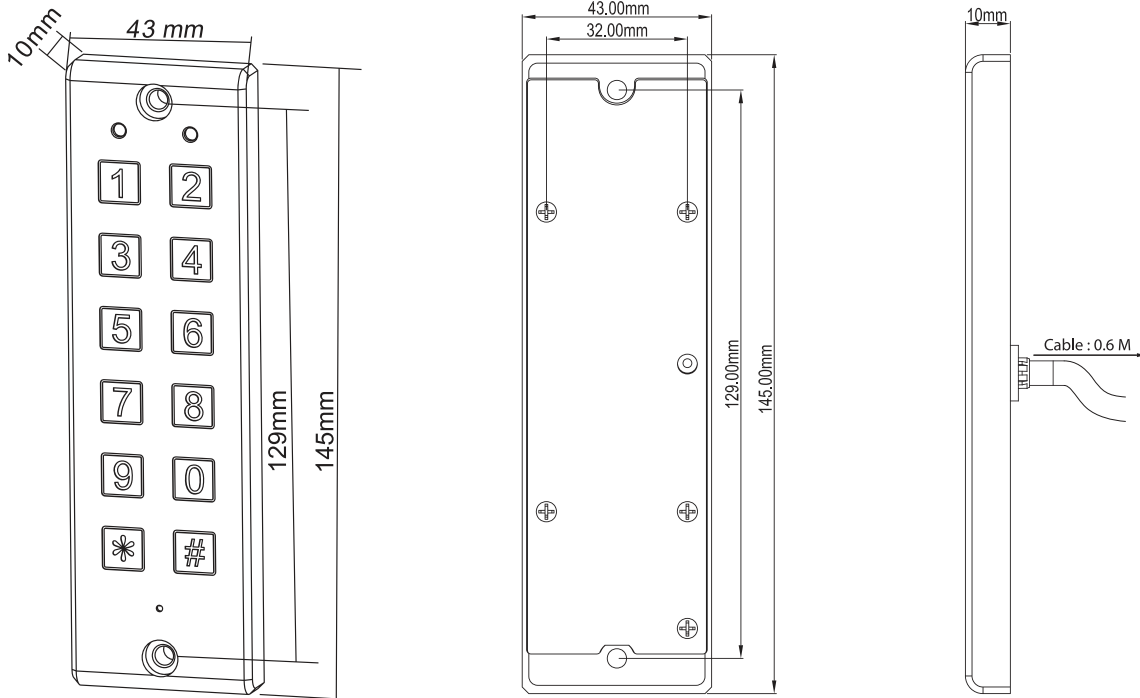

Related Product



- MDR-350/SLIM**
Piezoelectric Switch with Stainless Steel Plate
- Power Source : DC 12~24V
 - Flush Mount (IP65)
 - Latch or Timer Relay Output
 - Selectable Illumination Status
 - Contact Rated : DC 30V/2A



- MT-123**
E - Lock Power Supply
- Power Input : AC220V
 - DC Output : DC12V & 0.5A
 - N.O. Output : 12V 2A
 - N.C. Output : 12V 1A
 - Timer : 0~20 sec



- MDR-313 Series**
Siren with LED Flash Lamp
- LED Flash Lamp (Built-in Buzzer)
 - Red/Green/Yellow/Blue Color
 - Power Input: DC 24 V
 - Size: 86W x 86H x 45D mm



- BR - 2072**
Door & Gate Monitor
- Magnetic Contact (NC)
 - 18" Armored Cable
 - L Bracket
 - Action Distance: max. 75mm
 - Size: 77L x 25.5W x 13.5H mm

Additional Information

Please visit our Web page for more information: www.mitec.com.hk