


## SPECIFICATION


1. POWER: DC12V 250mA
2. MICROPHONE TYPE: CONDENSER MIC.
3. MIC. FREQUENCY: 100-16000Hz
4. DIRECTION: HEART DIRECTION
5. SENSITIVE:  $-40 \pm 2$ dB
6. DIMENSION: 155(W) x 130(D) x 370(H)mm
7. WEIGHT: 950g

**miTEC** BANK INTERCOM UNIT

## MBI-05 USER MANUAL

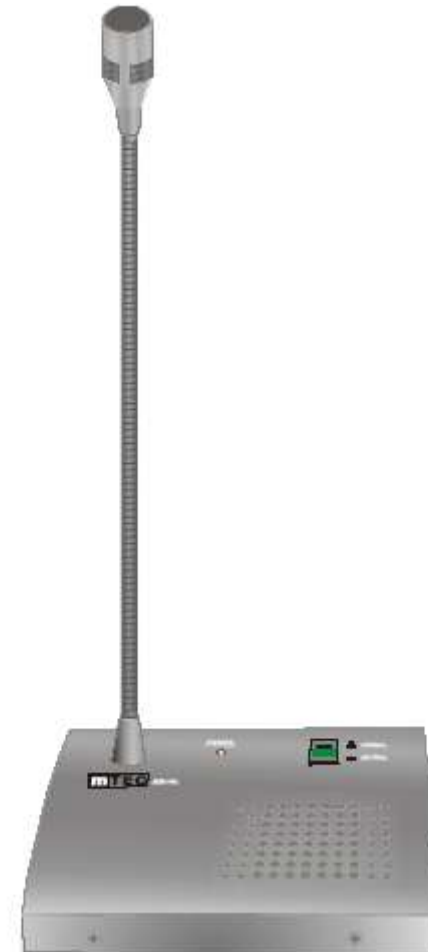


# MBI-05/MBI-05H FEATURES

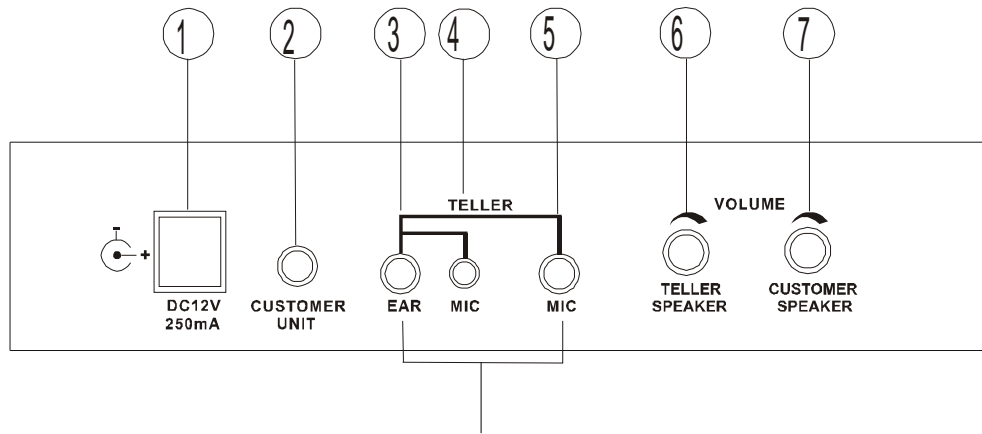

MBI-05H ONLY


1. DC POWER INPUT.  
DC12V INPUT, 2.1mm DC PLUG.
2. CUSTOMER UNIT OUTPUT.  
(Ø 3.5mm STEREO PHONE JACK)
3. EXTERNAL EARPHONE FOR MBI-05 (TELLER)  
DISABLE THE INTERNAL SPEAKER WHEN  
EXTERNAL EARPHONE PLUG IN. (Ø3.5mm)
4. EXTERNAL MIC. FOR MBI-05 (TELLER)  
DISABLE THE GOOSE NECK MIC WHEN  
EXTERNAL MIC. PLUG IN. (Ø2.5mm)
5. SAME AS FUNCTION 4, USING (Ø3.5mm PLUG)
6. TELLER VOLUMN CONTROL (MBI-05)  
ADJ. THE INTERNAL SPEAKER VOLUMN  
(ANTI-CLOCKWISE=LOW, CLOCKWISE=HIGH)

7. CUSTOMER SPEAKER VOLUMN (MBI-03)  
(ANTI-CLOCKWISE=LOW, CLOCKWISE=HIGH)

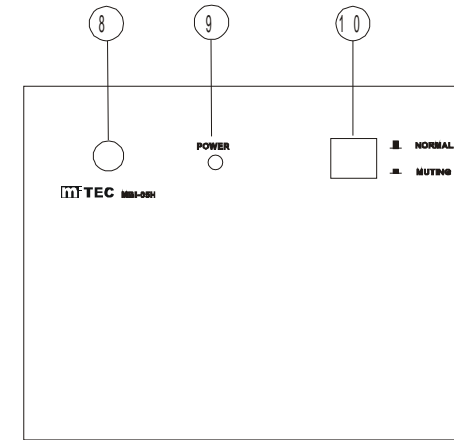

8. GOOSE NECK MIC.
9. POWER LED INDICATOR (RED).
10. MUTE BUTTON  
MUTE THE SPEAKER AT CUSTOMER UNIT(MBI-03)  
BY PRESSING THE BUTTON.

## CONNECTION

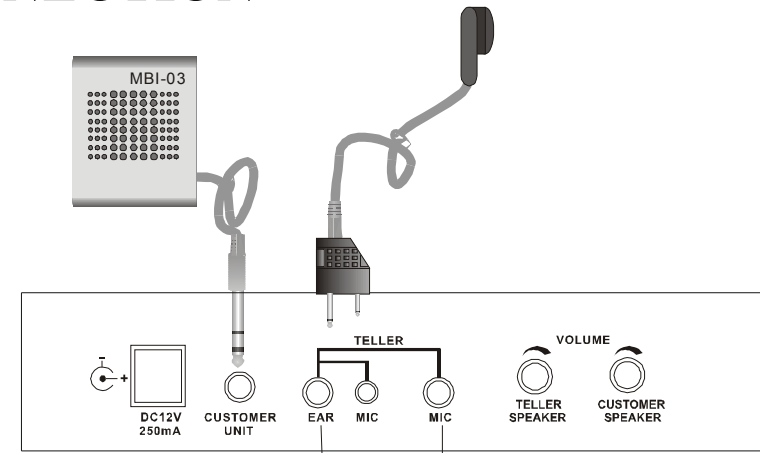

MBI-05H ONLY